

HUNT EKCO ELECTRIC BOILER



EKCO Boiler is one of the most modern and complete electric boilers in the world. It was designed as an installer friendly device to reduce unnecessary external plumbing and pipe work on the hydronic heating system.

Its compact casing allows the boiler to be easily wall-mounted in the most convenient place. Electric boilers do not only eliminate the need for a boiler room, but they also do not require a chimney or flue.



12 MONTH*
WARRANTY



MEASUREMENTS

710 mm (H) x 418 mm (W) x 251 mm (D)

COMPATIBLE THERMOSTATS

SALUS

IT600 Internet thermostat

SIEMENS

REV 13, REV 24 and RDE100.1 RFS

HONEYWELL

CMT907

GRASSLIN

FEELING and THERMIOTOUCH

FEATURES

- Panel control - electronic control board ensures regulation of water temperature in central heating installation between 20°C and 85°C
- Power board - consists of electronic and semiconductor elements to ensure noiseless and failure-free performance.
- Safety temperature limiter
- Differential pressure relief valve
- Magnetic filter - F-MAG 3/4"
- Expansion vessel (Capacity: 6litres)
- Circulation pump
- Safety valve- 0,3MPa
- Automatic air vent
- Pressure sensor



Cert No.
NSW26443


HUNT HEATING
The smart choice.

SHOWROOM

11 Fiveways Boulevard
Keysborough
VIC 3173

PHONE 1300 00 1800


FAX (+613) 9798 5133

enquiries@huntheat.com.au

www.huntheat.com.au

| Rated Power | kW | 4 | 6 | 8 | 4 | 6 | 8 |
|-------------------------------|-----------------|---------|-------|-------|----------|---|---------|
| Rated Voltage | | 230V~ | | | 400V 3N~ | | |
| Fuse rated current | A | 20 | 32 | 40 | 10 | | 16 |
| Min. connecting wires section | mm ² | 3 x 2.5 | 3 x 4 | 3 x 6 | 5 x 1 | | 5 x 1.5 |

| Rated Power | kW | 12 | 15 | 18 | 21 | 24 |
|-------------------------------|-----------------|----------|----|-------|----|-------|
| Rated Voltage | | 400V 3N~ | | | | |
| Fuse rated current | A | 20 | 25 | 32 | 40 | |
| Min. connecting wires section | mm ² | 5 x 2.5 | | 5 x 4 | | 5 x 6 |

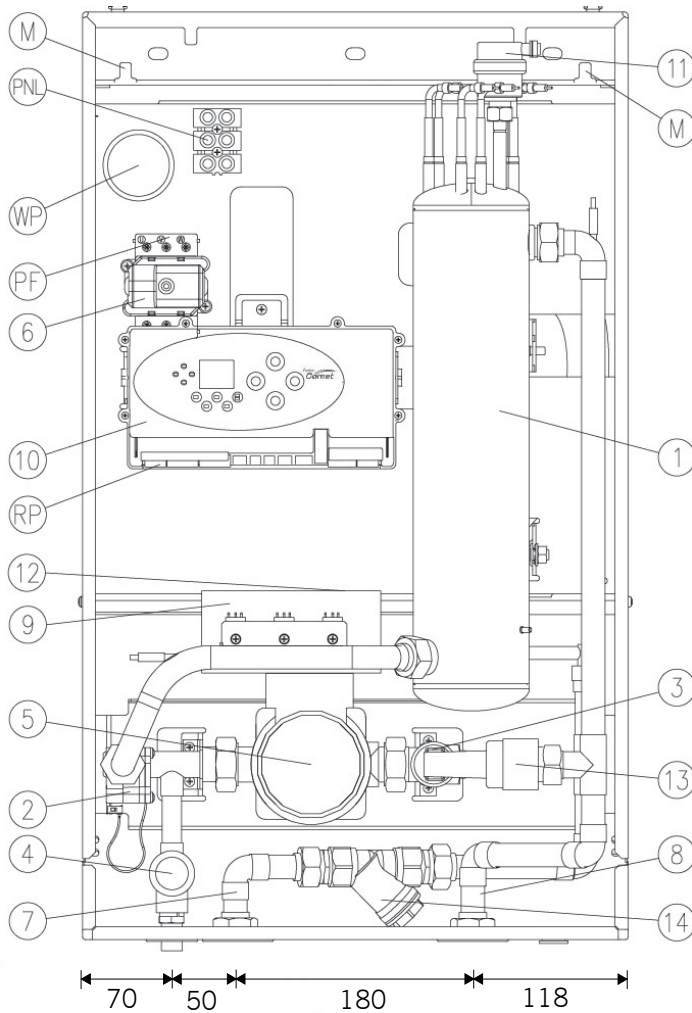

| | |
|----|---|
| 1 | Stainless Steel Heat Exchanger |
| 2 | Flow Sensor |
| 3 | Pressure Sensor |
| 4 | Safety Valve |
| 5 | Circulating Pump |
| 6 | Safety Temperature limiter |
| 7 | Return connection |
| 8 | Flow connection |
| 9 | Power Board |
| 10 | Control Module |
| 11 | Automatic Air Vent |
| 12 | Expansion Vessel and connection |
| 13 | By-pass Valve |
| 14 | Magnetic filter |
| PF | Internal "mains" phase connections from the PN connection block |
| PN | Incoming "mains" cable connection block |
| WP | Electric cable access |
| M | Boiler fixing points |
| RP | Room Thermostat volt free connection |